NEW PRODUCT RELEASE





TCT Holesaw SHORT SERIES



- With Arbor-shank
- Fixing screw for center drill
- Ejector holes
- The ejector spring ejects the waste and protects the TCT-teeth when center drilling
- Tapered center drill, centering without running off (center punching not necessary)







SMOOTHEST DRILLING





Suitable for pipes, curved or profiled surfaces - even weld seams, stainless steel up to 2mm, mild steel up to 4mm, nonferrous, plastics, wood up to 12mm. TCT holesaws can be re-sharpened.










RECOMMENDED SPEEDS

Ø 16 - 50,0mm = 10,0mm Shank

Ø 51,0 - 100,0mm = 13,0mm Shank

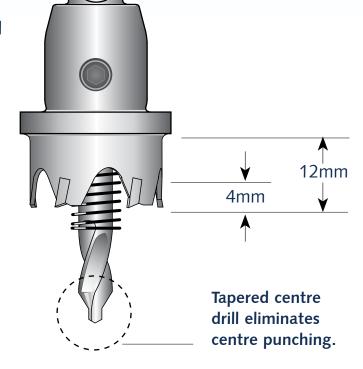

From measurements Ø 16 mm to 30.0 mm, the hole saw is made of one piece. From Ø 31.0 mm, we use specially hardened tool holders to compensate for the torsional power in case of heavy operation, which avoids early shearing off of the tool holder shank. As such, its construction is incomparable with any other design.

